

UGMII2.6-45


500mmx500mm Indoor

creative rental LED Display Unit



Product features:

1. Ultra light and thin product.
2. One cabinet for three uses

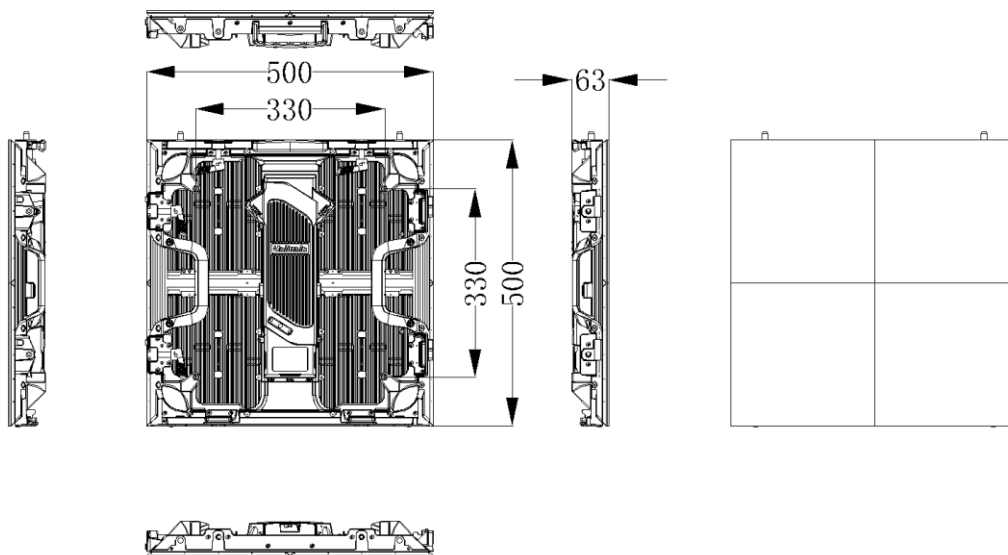

Main Technical Specifications:

Parameter	Value
Pixel Pitch	2.6mm
LED Type	3-in-1 Black SMD
Brightness	800 cd/m ²
Pixel Density	147,456 pixels/m ²
Pixels Per Panel	192x192 pixels
Module Size	W250mmxH250mm
Panel Size	W500mmxH500mmxD63mm
Weight	6 kg/panel
Maintenance	Rear
Ingress Protection	IP30
Aspect Ratio	1:1
Panel Area	0.25 m ²
Planeness	≤0.2mm
Recommended Viewing Distance	≥2.6m
Environment	Indoor
Material	Die-cast Aluminum
Calibration	Support Brightness and Chroma
Brightness Control	Manual/Automatic
Color Temperature	6,500K-9,300K Adjustable
Horizontal Viewing Angle	140°
Vertical Viewing Angle	120°
Contrast Ratio	3,000:1
Input Power <Max>	150 W/panel
Input Power <Typical>	50 W/panel
Input Voltage	200~240 VAC
Processing Depth	14 bit
Scan Method	1/24
Refresh Rate	3840 Hz
Video Frame Rate	50/60 Hz
Input Power Frequency	50~60 Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10°C~+45°C/10~80%RH
Storage Temperature/Humidity	-20°C~+50°C/10~80%RH
Power Status	Diagnostic LEDs
Standard Mounting Configuration	Hanging, Stacking

Note: Specifications are for reference only and are subject to change without notice.

Power consumption tolerance: ±15%, according to the actual situation.